



## FEATURES & SPECIFICATIONS

### PRODUCT OVERVIEW

White thermoplastic emergency unit.

### CONSTRUCTION

Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern. Track and swivel arrangement permits full range of lamp adjustment. Not intended for ceiling mounting.

### LAMP DATA

Two 5.4W DC T5 wedge-base lamps for emergency light.

### ELECTRONICS

Dual-voltage input 120V or 277V AC. Emergency unit provided with test switch, status indicator and rechargeable battery. Maintenance-free battery provides 90 minutes of emergency power.

### LISTINGS



UL Listed. Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards. Indoor damp location (10°C to 40°C) listed standard.

### WARRANTY

One-year warranty.

Catalog Number	
Notes	Type

## Units

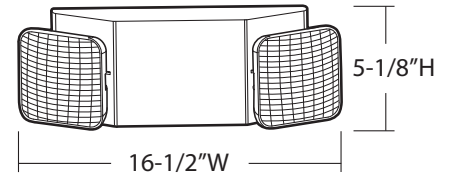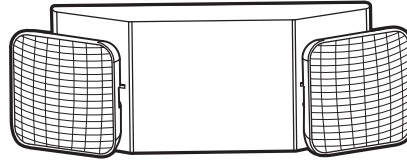

## ORDERING INFORMATION

Catalog Number	UPC	Description	Voltage	Wattage*	Pallet Qty.	Standard Carton Qty.
EU2M6	745973432020	Emergency lighting unit	6	5.4	180	6

\*per lamp head

# Emergency Units

---